

Air Powered Hand Tools

Introduction

Common types of air-powered hand tools used in industry are: buffers, chipping hammers, drills, grinders, impact tools, jack hammers, riveting guns, sanders, saws, sprayers and wrenches.

Hazards

- Poorly designed tool (wrist strain)
- Vibration (vibration-induced white finger)
- Noise (hearing loss)
- Dust (respiratory problems)


The following hazards have the potential to cause serious bodily injury:

- Incorrect tool selection
- Use of damaged tool
- Improper, inadequate, or no guards
- Rotating shaft (entanglement)
- Wheel breakage (grinder)
- Flying chips
- Whipping of the hose
- Accidental start up
- Compressed air entering the body
- Dropped tool
- Tripping over hose


Controls

Ergonomic Considerations


- Ensure that workers do not have to bend their wrist when using tools:
 - Provide tools equipped with handles designed to keep the wrist straight

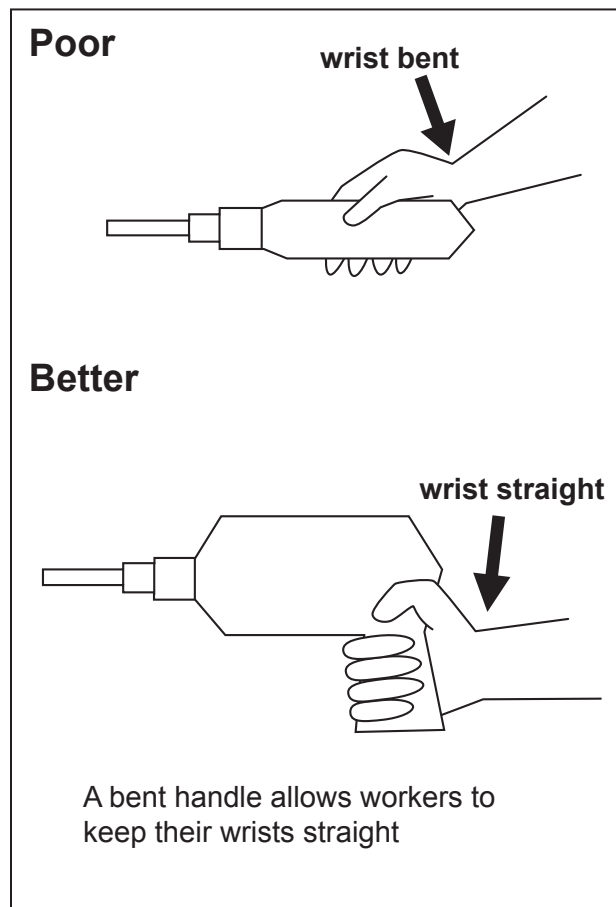

- Design tasks to allow workers to keep their wrists straight

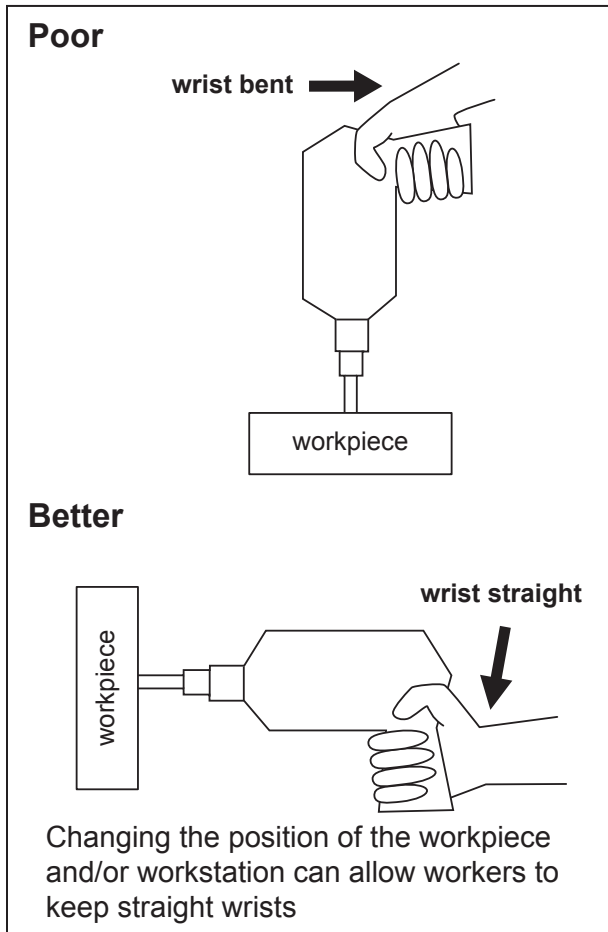

- Ensure that workers will not strain their wrist when using tools:
 - Provide tools with two handles

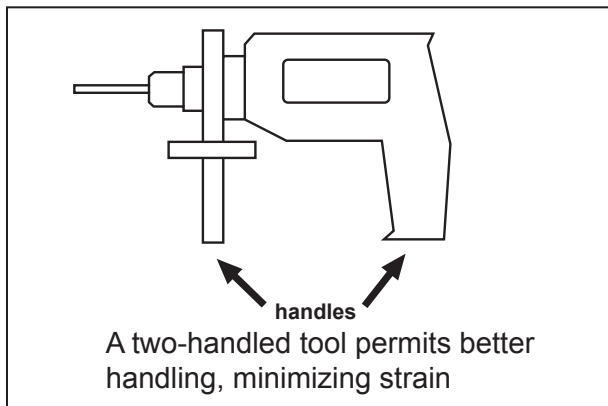

- provide tools that have most of their weight in or close to the handle
- provide lightweight tools that can be easily supported by one hand

- if the tool weighs more than 0.5 kg (approximately 11lb), support it with a counter-balance harness

- Ensure that workers have a good grip on the tool. The handle of the tool should:
 - have grips that allow the hand to wrap around the handle easily
 - be longer than the width of the hand
 - have triggers large enough for gripping with 2-3 fingers
 - be rounded and smooth (with no grooves) to prevent any pressure points
- Instruct workers to:
 - hold the tool as close to the body as possible
 - rest their hands by laying the tool down or inserting it in a holster when not in use
- To control the hazard of vibration, provide:
 - low-vibration tools
 - cork, rubber or plastic coverings for tool handles
 - anti-vibration gloves

Safe Use of Tools

Establish work procedures that include the following precautions:

- Ensure that the air supplied to tools is clean and dry. Dust, moisture, and corrosive fumes can damage tools. An in-line regulator filter and lubricator can increase tool life.
- Keep tools clean, lubricated, and maintained according to manufacturer's instructions (see Maintenance)
- Use hoses specifically designed to resist abrasion, cutting, crushing, interior deterioration, and failure from continuous flexing
- Only use attachments and accessories recommended by the manufacturers

- Make sure that hoses connected together are equipped with automatic shut-off couplers, or that a small chain is attached to each side of the coupler to prevent whipping if the coupler fails
- Wear the appropriate personal protective equipment (for example, eye/face protection, work boots equipped with metatarsal guards, hearing protection, or respiratory equipment against dust)
- Review the manufacturer's instructions before using a tool
- Operate tools at air pressures recommended by the manufacturers
- Match the speed rating of accessories with that of the tool. Over speeding is dangerous
- Do not use chrome hand sockets on wrenches. These can shatter dangerously
- Keep clothing and the hands away from the working end
- Never raise or lower a tool by the hose, use a handline
- Shut off the air and release the pressure before disconnecting a hose. *There should be an automatic, quick-release mechanism.*
- Before starting up a tool:
 - check for loose parts
 - clean the air filter
 - check the hose for cuts, wear, and other damage
 - lubricate, unless an airline lubricator is used
 - blow out the hose to remove moisture and dirt, and clean the nipple before connecting
 - check fittings for proper connection
 - ensure closure of control valve to prevent whipping, and open gradually for the same reason
- check air pressure at the tool against the manufacturer's recommendations
- close the stop valve in airline when changing tools; never kink the hose to save time
- check the tool retainer
- check guards

Training

To prevent serious injury, include the following in your training program:

- general precautions for the use and start up of tools
- what a particular tool is to be used for, and how it is to be held and operated
- manufacturer's recommendations for use, care, etc., of the tool
- the safety devices (for example, guards) with which the tool is equipped
- the operating problems that can occur (for example, binding, seizing, breaking)
- pre-use checks
- procedures for reporting tool defects, etc., to supervisor
- how to transport and store the tool
- how to evaluate possible environmental hazards (for example, flammability of substances, lighting, rough terrain)
- how to use attachments – proper installation, selection of size, speed
- how to inspect the tool
- the hazards of compressed air, and the effects of exposure to vibration, noise, and dusts generated when the tool is in use
- the proper use, care, and limitations of personal protective equipment

Maintenance

Review manufacture's instructions before establishing maintenance procedures. Include the following in your planned maintenance program:

- standard written procedures for each type of tool
- disconnecting the tool from the airline
- regular inspection, cleaning, and oiling of tools
- inspection of hoses and couplings
- checks for damage to frames or parts
- cleaning as recommended by the manufacturer – do not allow the use of flammable or toxic solvents
- availability and condition of guards
- checking with operators if any unusual situations are suspected
- inspection of valves
- replacement of worn parts
- adjustments as recommended by manufacturer
- resharpening blades, bits, etc. according to manufacturer's instructions
- checks of chucks, collets, etc.
- a final visual check
- maintenance records

All maintenance work should be carried out by trained, qualified personnel.

Legislation

Regulations respecting Industrial Establishments (Reg. 851);

s.66: A compressed air or other compressed gas blowing device shall not be used for blowing dust or other substances:

- a) from clothing worn by a worker except where the device limits increase in pressure when the nozzle is blocked
- b) in such a manner as to endanger the safety of any worker

Note: IAPA recommends that compressed air never be used to blow dust, etc., from clothes, body and/or work surfaces. Use a vacuum cleaner or brush instead.

s.79-86: Use of personal protective equipment or clothing.

Tool Inspection Checklist

This sample checklist may be used as a pre-shift check, a maintenance check, or a department check. Adapt it to suit your own needs.

Department:	Dates of Inspection											
<input checked="" type="checkbox"/> Acceptable <input type="checkbox"/> Unacceptable												
Tool guards in place and functional?												
Safety chain operative?												
Tool parts not broken or prematurely worn (e.g., teeth, gears)?												
Bits and tools properly sharpened?												
Tool spindle turns freely?												
Tool properly lubricated?												
Throttle (trigger) functioning correctly?												
Motor runs freely?												
Pistons running correctly?												
Speed regulator/governor properly maintained?												
Hose and couplings in good condition?												
Air flows freely from exhaust?												
Motor vanes in good repair?												
Air motor and throttle valve free of dirt?												
No air leaks at or in tool?												
Air pressure rating clearly marked (if not 90 psig)?												
Noise level of tool controlled?												
Vibration of tool controlled?												
Operating manual and written work procedures available to operator?												
Proper tool storage facilities provided?												
Maintenance and repair records kept?												

© INDUSTRIAL ACCIDENT PREVENTION
ASSOCIATION, 2003, 2005, 2006, 2008.

All rights reserved. As part of IAPA's mission to inform and educate, IAPA permits users to reproduce this material for their own internal training and educational purposes only. For any other purpose, including use in conjunction with fee for service or other commercial activities, no part of this material may be used, reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopy, recorded, or otherwise, without the express prior written permission of the Industrial Accident Prevention Association.

The information contained in this material is provided voluntarily as a public service. No warranty, guarantee or representation is made by IAPA as to the correctness, suitability, fitness, or sufficiency of any information contained in this material. Use of this material means that the user agrees that IAPA and its employees will not have and are released from any liability whatsoever, however caused or arising, in connection therewith. Users also acknowledge that it cannot be assumed that all acceptable safety measures are contained in this material or that additional measures may not be required in the conditions or circumstances that are applicable to the user or his/her organization, and that the user will personally make his/her own assessment of the information contained in this material.

While IAPA does not undertake to provide a revision service or guarantee accuracy, we shall be pleased to respond to your individual requests for information.

Revised: May 2008

Industrial Accident Prevention Association

Toll-free: 1-800-406-IAPA (4272)

Website: www.iapa.ca